LITESCREEN®

Instructions for use

1. Place the assembled Litescreen on the floor with the inside up.
2. Loosen the hook and loop fasteners (they are not needed when using the insulation).
3. Begin with the first insulation piece (make sure the gray band is facing down).
4. Start from a long side and thread the insulation between the canvas and the poles.
5. Center the insulation piece. Adjust so it fits behind the center cross and in the corners.
6. Thread the second insulation piece in the same way from the other long side (with the gray band facing down). Fasten one hook and loop strap.
7. The second hook and loop strap is easier to fasten from the short side as you may need to adjust the two insulation pieces.
8. Fold the Litescreen. Now it is ready to mount as usual.
9. When the Litescreen is mounted make sure the insulation is tightly placed against the façade. See Figure 1.

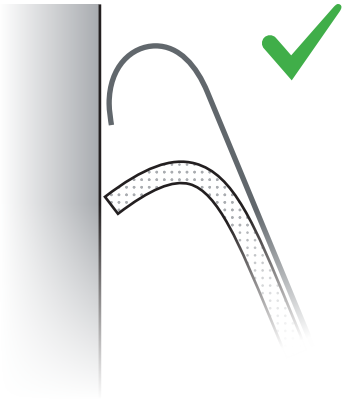


Figure 1: Tightly placed against the facade


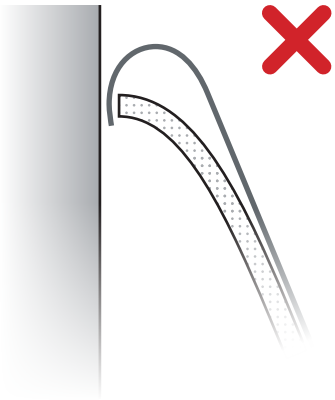


Figure 2: All the way out in the canvas pocket

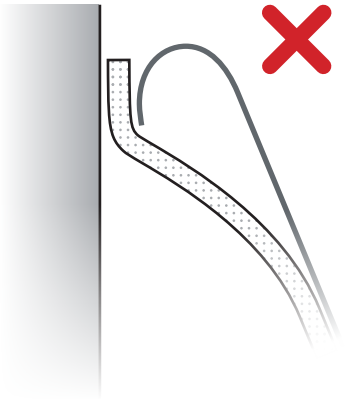

Figur 3: Squeezed between facade and canvas

Bra att veta

- **The insulation works best against smooth surfaces.**
- **The insulation is rolled in the packaging, so you may need to straighten it slightly to make it easier to handle (roll up in the opposite direction).**
- **The insulation is made a little larger than the Litescreen canvas! This is so you can adjust it tightly against the facade.**
- **With the insulation, the Litescreen might feel a little awkward to handle. Therefore, make sure that no sharp objects that could damage the canvas are in the window frame.**
- **A final adjustment of the insulation should be made when the Litescreen is mounted.**
- **At freezing temperatures or when the wind is strong added heat might be needed.**